


InoxFlow

UFS, UVS

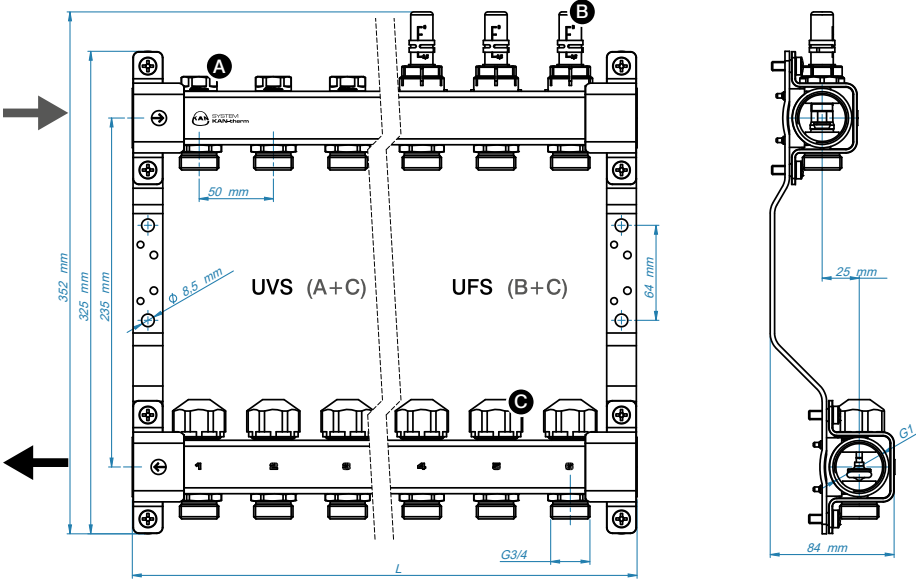

No	2	3	4	5	6	7	8	9	10	11	12
L [mm]	140	190	240	290	340	390	440	490	540	590	640
UVS	1316160033	1316160034	1316160035	1316160036	1316160037	1316160038	1316160039	1316160040	1316160041	1316160042	1316160043
m [g]	1450	1900	2300	2750	3200	3600	4000	4500	4900	5400	5800
UFS	1316157066	1316157067	1316157068	1316157069	1316157070	1316157071	1316157072	1316157073	1316157074	1316157075	1316157076
m [g]	1372	1769	2166	2563	2960	3357	3754	4151	4548	4944	5341

A

5&6 mm hex

Kvs = 2,4

T_{max} = 90°C

p_{max} = 10 bar

H₂O = 100% / glycol = max 50%

B

0-2,5 l/min

Kvs = 1,1

T_{max} = 70°C

p_{max} = 6 bar

H₂O = 100% / glycol = max 50%

C

M30×1,5


Kvs = 2,4

F_{min} = 50 N

Δh = 4 mm


InoxFlow

UVST

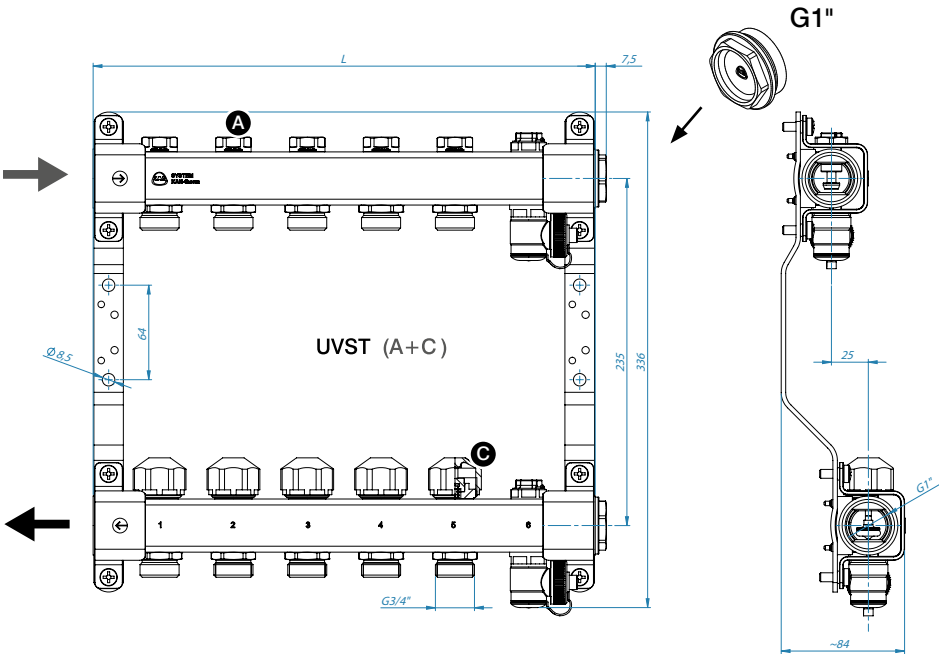

No	2	3	4	5	6	7	8	9	10	11	12
L [mm]	190	240	290	340	390	440	490	540	590	640	690
UVST	1316157128	1316157129	1316157130	1316157131	1316157132	1316157133	1316157134	1316157135	1316157136	1316157137	1316157138
m [g]	1946	2376	2807	3237	3668	4098	4529	4959	5389	5820	6250

A



5&6 mm hex

Kvs = 2,4

p_{max} = 10 bar

h₂O = 100% / glycol = max 50%

C



M30×1,5


Kvs = 2,4

F_{min} = 90 N

L_{min} = 4 mm

InoxFlow

UFST

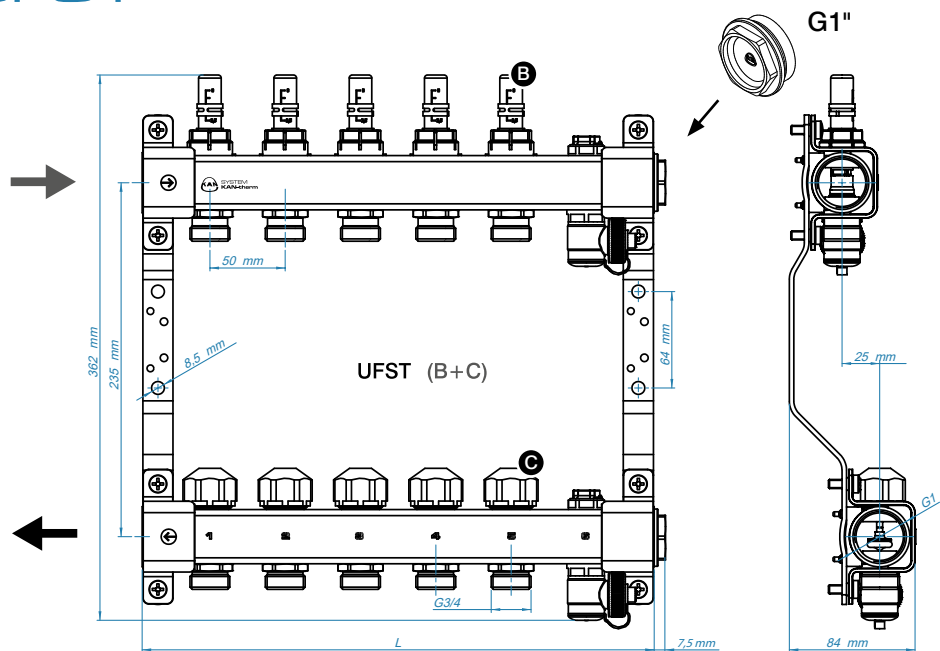

No	2	3	4	5	6	7	8	9	10	11	12
L [mm]	190	240	290	340	390	440	490	540	590	640	690
UFST	1316157077	1316157078	1316157079	1316157080	1316157081	1316157082	1316157083	1316157084	1316157085	1316157086	1316157087
m [g]	1800	2200	2600	3000	3400	3800	4200	4600	5000	5400	5800

0-2,5 l/min

Kvs = 1,1

T_{max} = 70°C

P_{max} = 6 bar

H₂O = 100% / glycol = max 50%

M30×1,5


Kvs = 2,4

F_{min} = 50 N


Δh = 4 mm

InoxFlow

UFST MAX

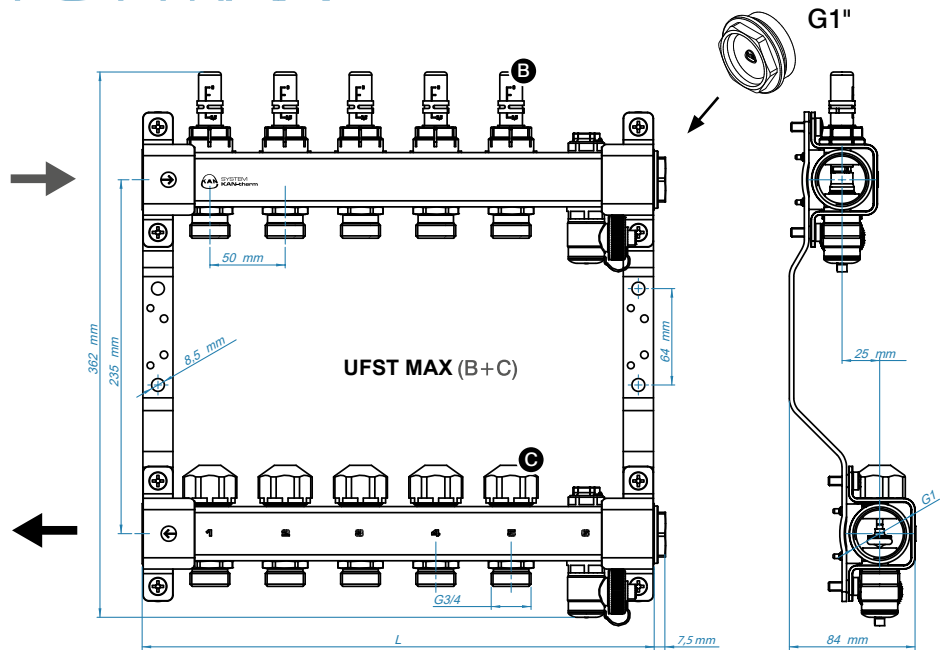


No	2	3	4	5	6	7	8	9	10	11	12
L [mm]	190	240	290	340	390	440	490	540	590	640	690
UFST max	1316157139	1316157140	1316157141	1316157142	1316157143	1316157144	1316157145	1316157146	1316157147	1316157148	1316157149
m [g]	1800	2200	2600	3000	3400	3800	4200	4600	5000	5400	5800






B
 max
 0-5 l/min
 Kvs = 1,1
 T_{max} = 70°C
 P_{max} = 6 bar
 H₂O = 100% / glycol = max 50%



C
 M30×1,5
 Kvs = 2,4
 F_{min} = 50 N
 Δh = 4 mm

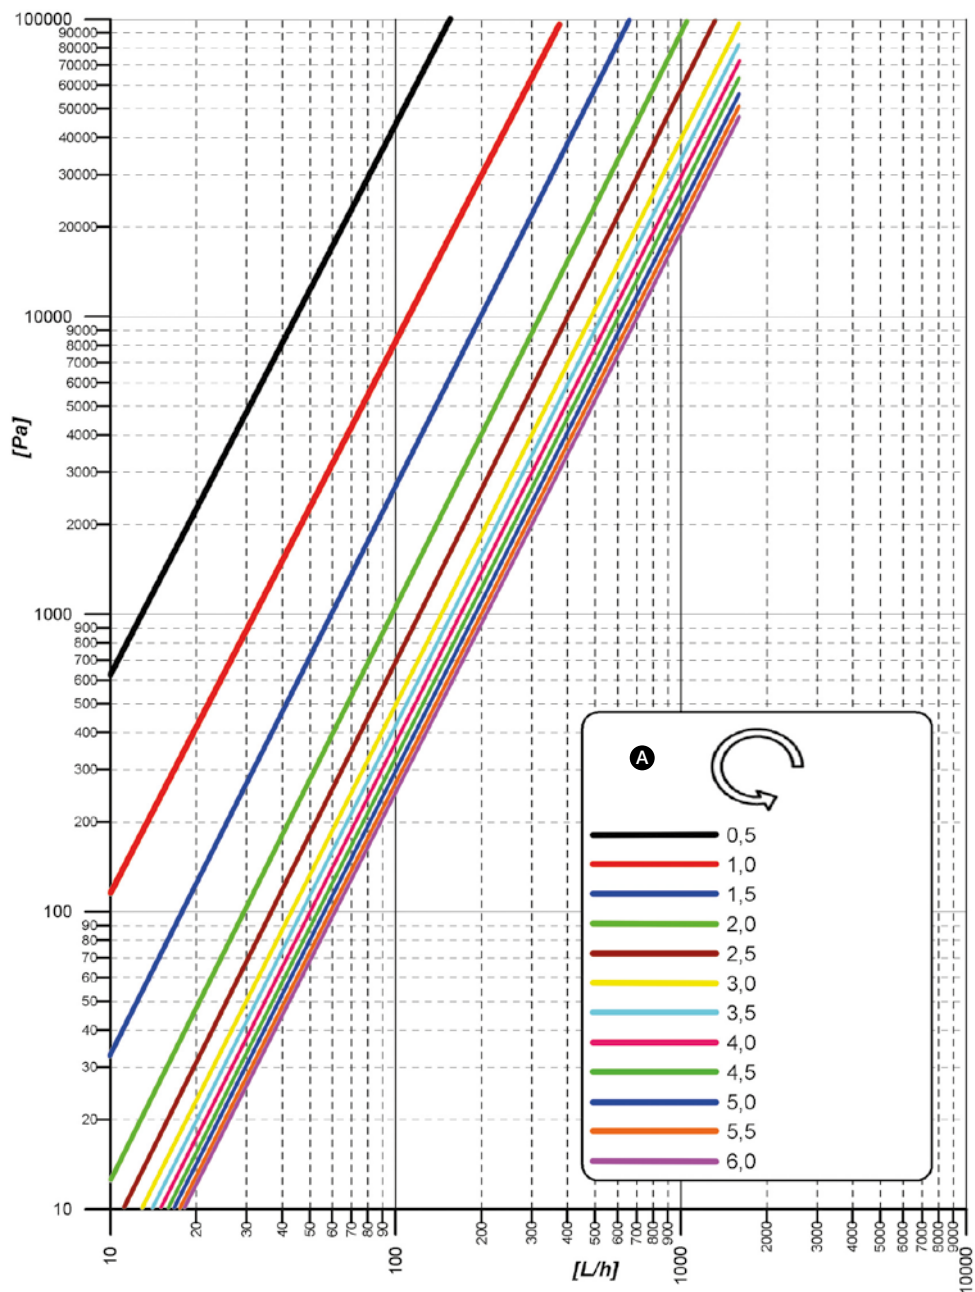

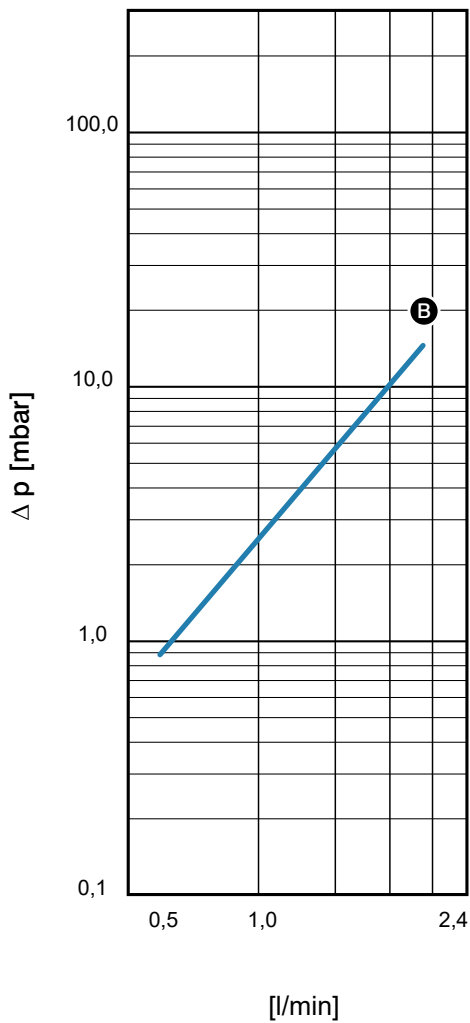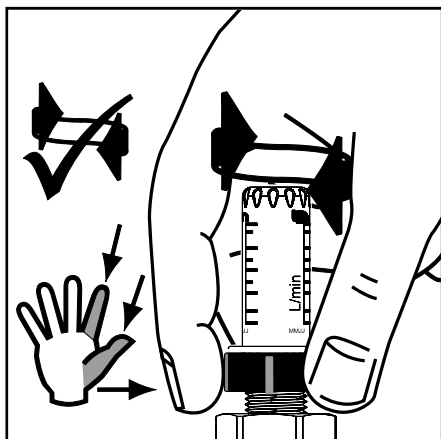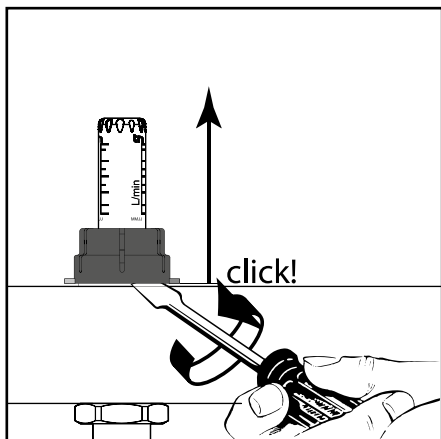

$T_{\max} = 70^{\circ}\text{C}$

$p_{\max} = 6 \text{ bar}$

$\text{H}_2\text{O} - 100\%$

Glycol – max 50%



KAN Sp. z o.o.
ul. Zdrojowa 51
16-001 Białystok-Kleosin

© KAN 2020

www.kan-therm.com